

158宽VBS系列牵引用铅酸电池

Series VBS158 Wide Lead Acid
Battery for Tracttion



型号 Type	5小时率 额定容量 5hr Capacity (Ah)	最大外型尺寸(mm) Overall dimensions				参考质量±5% Reference Weight (kg)		容量材料 Material of container 槽/盖	极柱 数量	单体 电池 电压 (V)	备注
		长 L	宽 W	高 H	总高 H	无液 Dry	带液 Wet				
2VBS100	100	45	158	385	420	5.5	7	PP	2	2	
3VBS150	150	61	158	385	420	8	10.2	PP	2	2	
4VBS200	200	77	158	385	420	10	13	PP	2	2	
5VBS250	250	93	158	385	420	12	16	PP	2	2	
6VBS300	300	109	158	385	420	14	18.5	PP	2或4	2	
7VBS350	350	125	158	385	420	16.5	21.5	PP	2或4	2	
8VBS400	400	145	158	385	420	18.5	24.5	PP	2或4	2	
9VBS450	450	157	158	385	420	21	27	PP	2或4	2	
10VBS500	500	173	158	385	420	23.5	31	PP	2或4	2	
11VBS550	550	184	158	385	420	26	34	PP	4	2	
12VBS600	600	203	158	385	420	28	37	PP	4	2	
13VBS650	650	221	158	385	420	30.5	40	PP	4	2	
14VBS700	700	241	158	385	420	33	42.5	PP	4	2	
15VBS750	750	253	158	385	420	35	45.5	PP	4	2	
2VBS110	110	45	158	430	465	6	7.5	PP	2	2	
3VBS165	165	61	158	430	465	8.5	11.2	PP	2	2	
4VBS220	220	77	158	430	465	11	14	PP	2	2	
5VBS275	275	93	158	430	465	13	17.5	PP	2	2	
6VBS330	330	109	158	430	465	15.5	20.5	PP	2或4	2	
7VBS385	385	125	158	430	465	18	23.5	PP	2或4	2	
8VBS440	440	145	158	430	465	20.5	27	PP	2或4	2	
9VBS495	495	157	158	430	465	23	30	PP	2或4	2	
10VBS550	550	173	158	430	465	26	34	PP	2或4	2	
11VBS605	605	184	158	430	465	28.5	37.5	PP	4	2	
12VBS660	660	203	158	430	465	31	41	PP	4	2	
13VBS715	715	221	158	430	465	33.5	44	PP	4	2	

型号 Type	5小时率 额定容量 5hr Capacity (Ah)	最大外型尺寸(mm) Overall dimensions				参考质量 ± 5% Reference Weight (kg)		容量材料 Material of container 槽 / 盖	极柱 数量	单体 电池 电压 (V)	备注
		长	宽	高	总高	无液	带液				
		L	W	H	H	Dry	Wet				
14VBS770	770	241	158	430	465	36	47	PP	4	2	
15VBS825	825	253	158	430	465	38.5	50	PP	4	2	
2VBS120	120	45	158	430	465	6.5	8.2	PP	2	2	
3VBS180	180	61	158	430	465	9	12	PP	2	2	
4VBS240	240	77	158	430	465	12	15.5	PP	2	2	
5VBS300	300	93	158	430	465	14	19	PP	2	2	
6VBS360	360	109	158	430	465	16.5	22.5	PP	2或4	2	
7VBS420	420	125	158	430	465	19.5	26	PP	2或4	2	
8VBS480	480	145	158	430	465	22	29.5	PP	2或4	2	
9VBS540	540	157	158	430	465	25	33	PP	2或4	2	
10VBS600	600	173	158	430	465	28	37	PP	2或4	2	
11VBS660	660	184	158	430	465	30.5	41	PP	4	2	
12VBS720	720	203	158	430	465	33.5	45	PP	4	2	
13VBS780	780	221	158	430	465	36	48	PP	4	2	
14VBS840	840	241	158	430	465	39	51.5	PP	4	2	
15VBS900	900	253	158	430	465	41.5	55	PP	4	2	
2VBS130	130	45	158	460	495	7	9.2	PP	2	2	
3VBS195	195	61	158	460	495	9.8	13	PP	2	2	
4VBS260	260	77	158	460	495	12.5	16.5	PP	2	2	
5VBS325	325	93	158	460	495	15.5	20	PP	2	2	
6VBS390	390	109	158	460	495	18.2	24	PP	2或4	2	
7VBS455	455	125	158	460	495	21	27.5	PP	2或4	2	
8VBS520	520	145	158	460	495	24	31	PP	2或4	2	
9VBS585	585	157	158	460	495	27	35.5	PP	2或4	2	
10VBS650	650	173	158	460	495	30	39	PP	2或4	2	
11VBS715	715	184	158	460	495	33	42.5	PP	4	2	
12VBS780	780	203	158	460	495	36	46.5	PP	4	2	
13VBS845	845	221	158	460	495	39	50.5	PP	4	2	
14VBS910	910	241	158	460	495	42	54.5	PP	4	2	
15VBS975	975	253	158	460	495	45	58	PP	4	2	
2VBS140	140	45	158	470 ~ 495	505 ~ 525	7.5	9.8	PP	2	2	
3VBS210	210	61	158	470 ~ 495	505 ~ 525	10.5	14	PP	2	2	
4VBS280	280	77	158	470 ~ 495	505 ~ 525	13.5	18	PP	2	2	
5VBS350	350	93	158	470 ~ 495	505 ~ 525	16.5	22	PP	2	2	

型号 Type	5小时率 额定容量 5hr Capacity (Ah)	最大外型尺寸(mm) Overall dimensions				参考质量 ± 5% Reference Weight (kg)		容量材料 Material of container 槽 / 盖	极柱 数量	单体 电池 电压 (V)	备注
		长	宽	高	总高	无液	带液				
		L	W	H	H	Dry	Wet				
6VBS420	420	109	158	470 ~ 495	505 ~ 525	19.5	25.5	PP	2或4	2	
7VBS490	490	125	158	470 ~ 495	505 ~ 525	22.5	30	PP	2或4	2	
8VBS560	560	141	158	470 ~ 495	505 ~ 525	26	34	PP	2或4	2	
9VBS630	630	157	158	470 ~ 495	505 ~ 525	29	38.5	PP	2或4	2	
10VBS700	700	173	158	470 ~ 495	505 ~ 525	32	42.5	PP	2或4	2	
11VBS770	770	184	158	470 ~ 495	505 ~ 525	35	46	PP	4	2	
12VBS840	840	205	158	470 ~ 495	505 ~ 525	38	50	PP	4	2	
13VBS910	910	221	158	470 ~ 495	505 ~ 525	41	54	PP	4	2	
14VBS980	980	241	158	470 ~ 495	505 ~ 525	44	58	PP	4	2	
15VBS1050	1050	253	158	470 ~ 495	505 ~ 525	47	62	PP	4	2	
2VBS160	160	45	158	525	560	8.5	11	PP	2	2	
3VBS240	240	61	158	525	560	12	15.5	PP	2	2	
4VBS320	320	77	158	525	560	15.3	20	PP	2	2	
5VBS400	400	93	158	525	560	18.5	24.5	PP	2	2	
6VBS480	480	109	158	525	560	22	29	PP	2或4	2	
7VBS560	560	125	158	525	560	26	34	PP	2或4	2	
8VBS640	640	145	158	525	560	30	38	PP	2或4	2	
9VBS720	720	157	158	525	560	33.5	43	PP	2或4	2	
10VBS800	800	173	158	525	560	37.5	47	PP	2或4	2	
11VBS880	880	184	158	525	560	41	52	PP	4	2	
12VBS960	960	203	158	525	560	44	57	PP	4	2	
13VBS1040	1040	221	158	525	560	47	62	PP	4	2	
14VBS1120	1120	241	158	525	560	51.5	67	PP	4	2	
15VBS1200	1200	253	158	525	560	55.5	72	PP	4	2	
2VBS180	180	45	158	620	655	9.5	12.5	PP	2	2	
3VBS270	270	61	158	620	655	13.2	17	PP	2	2	
4VBS360	360	77	158	620	655	17.2	22.5	PP	2	2	
5VBS450	450	93	158	620	655	21	27.5	PP	2	2	
6VBS540	540	109	158	620	655	25.5	33	PP	2或4	2	
7VBS630	630	125	158	620	655	29.5	38.5	PP	2或4	2	
8VBS720	720	145	158	620	655	33.2	43	PP	2或4	2	
9VBS810	810	157	158	620	655	37	48	PP	2或4	2	
10VBS900	900	173	158	620	655	41	53.5	PP	2或4	2	
11VBS990	990	184	158	620	655	45	59	PP	4	2	

型号 Type	5小时率 额定容量 5hr Capacity (Ah)	最大外型尺寸(mm) Overall dimensions				参考质量±5% Reference Weight (kg)		容量材料 Material of container 槽/盖	极柱 数量	单体 电池 电压 (V)	备注
		长	宽	高	总高	无液	带液				
		L	W	H	H	Dry	Wet				
12VBS1080	1080	203	158	620	655	49	64.5	PP	4	2	
13VBS1170	1170	221	158	620	655	53	70	PP	4	2	
14VBS1260	1260	241	158	620	655	57	75.5	PP	4	2	
15VBS1350	1350	253	158	620	655	61	81	PP	4	2	
2VBS200	200	45	158	690	725	10.7	14	PP	2	2	
3VBS300	300	61	158	690	725	15	19.5	PP	2	2	
4VBS400	400	77	158	690	725	19.3	25	PP	2	2	
5VBS500	500	93	158	670	705	23.5	30.5	PP	2	2	
6VBS600	600	109	158	690	725	28.5	37	PP	2或4	2	
7VBS700	700	125	158	690	725	33	43	PP	2或4	2	
8VBS800	800	145	158	690	725	37.5	48	PP	2或4	2	
9VBS900	900	157	158	690	725	41.5	54	PP	2或4	2	
10VBS1000	1000	173	158	690	725	46	60	PP	2或4	2	
11VBS1100	1100	184	158	690	725	50.5	66	PP	4	2	
12VBS1200	1200	203	158	690	725	55	72	PP	4	2	
13VBS1300	1300	221	158	690	725	59.5	78	PP	4	2	
14VBS1400	1400	241	158	690	725	64	84	PP	4	2	
15VBS1500	1500	253	158	690	725	68.5	90	PP	4	2	

158宽VBS系列牵引用铅酸电池


Series VBS158 Wide Lead Acid

Battery for Traction



198宽PZS系列牵引用铅酸蓄电池

Series PZS198 Wide Lead Acid Battery for Traction

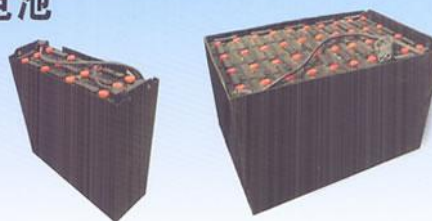

型号 Type	5小时率 额定容量 5hr Capacity (Ah)	最大外型尺寸(mm) Overall dimensions				参考质量 ± 5% Reference Weight (kg)		容量材料 Material of container 槽 / 盖	极柱 数量	单体 电池 电压 (V)	备注
		长	宽	高	总高	无液	带液				
		L	W	H	H	Dry	Wet				
2PZS110	110	47	198	340	375	6.3	9	PP	2	2	
3PZS165	165	65	198	340	375	9	12	PP	2	2	
4PZS220	220	83	198	340	375	11.5	15.5	PP	2	2	
5PZS275	275	101	198	340	375	14	18.5	PP	2	2	
6PZS330	330	119	198	340	375	16.5	22	PP	2或4	2	
7PZS385	385	137	198	340	375	19	26	PP	2或4	2	
8PZS440	440	155	198	340	375	21.5	28.5	PP	2或4	2	
9PZS495	495	173	198	340	375	24	32	PP	2或4	2	
10PZS550	550	191	198	340	375	27	36	PP	4	2	
2PZS140	140	47	198	390 ~ 420	425 ~ 455	7.8	10.5	PP	2	2	
3PZS210	210	65	198	390 ~ 420	425 ~ 455	11	14.5	PP	2	2	
4PZS280	280	83	198	390 ~ 420	425 ~ 455	14	18.5	PP	2	2	
5PZS350	350	101	198	390 ~ 420	425 ~ 455	17	22.5	PP	2	2	
6PZS420	420	119	198	390 ~ 420	425 ~ 455	20	27	PP	2或4	2	
7PZS490	490	137	198	390 ~ 420	425 ~ 455	23	30.5	PP	2或4	2	
8PZS560	560	155	198	390 ~ 420	425 ~ 455	26.5	35	PP	2或4	2	
9PZS630	630	173	198	390 ~ 420	425 ~ 455	29.5	39	PP	2或4	2	
10PZS700	700	191	198	390 ~ 420	425 ~ 455	32.5	43	PP	4	2	
2PZS160	160	47	198	430 ~ 445	465 ~ 480	8.7	11.5	PP	2	2	
3PZS240	240	65	198	430 ~ 445	465 ~ 480	12.5	16.5	PP	2	2	
4PZS320	320	83	198	430 ~ 445	465 ~ 480	16	21.5	PP	2	2	
5PZS400	400	101	198	430 ~ 445	465 ~ 480	20	26	PP	2	2	
6PZS480	480	119	198	430 ~ 445	465 ~ 480	23.5	31	PP	2或4	2	
7PZS560	560	137	198	430 ~ 445	465 ~ 480	27.7	36	PP	2或4	2	
8PZS640	640	155	198	430 ~ 445	465 ~ 480	31.5	41.5	PP	2或4	2	
9PZS720	720	173	198	430 ~ 445	465 ~ 480	35.2	46.2	PP	2或4	2	
10PZS800	800	191	198	430 ~ 445	465 ~ 480	39	51	PP	4	2	
2PZS180	180	47	198	500	535	9.8	13	PP	2	2	

型号 Type	5小时率 额定容量 5hr Capacity (Ah)	最大外型尺寸(mm) Overall dimensions				参考质量±5% Reference Weight (kg)		容量材料 Material of container 槽 / 盖	极柱 数量	单体 电池 电压 (V)	备注
		长	宽	高	总高	无液	带液				
		L	W	H	H	Dry	Wet				
3PZS270	270	65	198	500	535	13.8	18	PP	2	2	
4PZS360	360	83	198	500	535	18	24	PP	2	2	
5PZS450	450	101	198	500	535	22	29.5	PP	2	2	
6PZS540	540	119	198	500	535	26	35	PP	2或4	2	
7PZS630	630	137	198	500	535	31	41	PP	2或4	2	
8PZS720	720	155	198	500	535	35	46.5	PP	2或4	2	
9PZS810	810	173	198	500	535	39	52	PP	2或4	2	
10PZS900	900	191	198	500	535	43	57.5	PP	4	2	
2PZS200	200	47	198	560-575	595-610	11	62	PP	2	2	
3PZS300	300	65	198	560-575	595-610	15.5	14.5	PP	2	2	
4PZS400	400	83	198	560-575	595-610	19.8	25.5	PP	2	2	
5PZS500	500	101	198	560-575	595-610	24	31	PP	2	2	
6PZS600	600	119	198	560-575	595-610	29	37.5	PP	2或4	2	
7PZS700	700	137	198	560-575	595-610	33.5	43.5	PP	2或4	2	
8PZS800	800	155	198	560-575	595-610	37.5	48.5	PP	2或4	2	
9PZS900	900	173	198	560-575	595-610	42	55	PP	2或4	2	
10PZS1000	1000	191	198	560-575	595-610	47	62	PP	4	2	
2PZS220	220	47	198	570	605	11.5	15	PP	2	2	
3PZS330	330	65	198	570	605	16.5	21	PP	2	2	
4PZS440	440	83	198	570	605	21	26.5	PP	2	2	
5PZS550	550	101	198	570	605	26.5	32.5	PP	2	2	
6PZS660	660	119	198	570	605	30.5	39	PP	2或4	2	
7PZS770	770	137	198	570	605	35.5	45.5	PP	2或4	2	
8PZS880	880	155	198	570	605	39.5	50.5	PP	2或4	2	
9PZS990	990	173	198	570	605	46.5	57.5	PP	2或4	2	
10PZS1100	1100	191	198	570	605	49.5	64.5	PP	4	2	
2PZS230	230	47	198	670	705	13	17	PP	2	2	
3PZS345	345	65	198	670	705	18.2	24	PP	2	2	
4PZS460	460	83	198	670	705	23.5	30	PP	2	2	
5PZS575	575	101	198	670	705	28.8	38	PP	2	2	
6PZS690	690	119	198	670	705	34	45	PP	2或4	2	
7PZS805	805	137	198	670	705	40.2	53	PP	2或4	2	
8PZS920	920	155	198	670	705	45.5	60	PP	2或4	2	
9PZS1035	1035	173	198	670	705	51	67	PP	2或4	2	
10PZS1150	1150	191	198	670	705	56	74	PP	4	2	
2PZS240	240	47	198	675-690	710-725	13.5	17.5	PP	2	2	

型号 Type	5小时率 额定容量 5hr Capacity (Ah)	最大外型尺寸(mm) Overall dimensions				参考质量 ± 5% Reference Weight (kg)		容量材料 Material of container 槽 / 盖	极柱 数量	单体 电池 电压 (V)	备注
		长	宽	高	总高	无液	带液				
		L	W	H	H	Dry	Wet				
3PZS360	360	65	198	675 ~ 690	710 ~ 725	19	25	PP	2	2	
4PZS480	480	83	198	675 ~ 690	710 ~ 725	25	33	PP	2	2	
5PZS600	600	101	198	675 ~ 690	710 ~ 725	31	41	PP	2	2	
6PZS720	720	119	198	675 ~ 690	710 ~ 725	37	48.5	PP	2或4	2	
7PZS840	840	137	198	675 ~ 690	710 ~ 725	43.5	56	PP	2或4	2	
8PZS960	960	155	198	675 ~ 690	710 ~ 725	49.5	62.5	PP	2或4	2	
9PZS1080	1080	173	198	675 ~ 690	710 ~ 725	55	70	PP	2或4	2	
10PZS1200	1200	191	198	675 ~ 690	710 ~ 725	60	77.5	PP	4	2	
2PZS260	260	47	198	680	715	13.8	18.2	PP	2	2	
3PZS390	390	65	198	680	715	19.3	25.5	PP	2	2	
4PZS520	520	83	198	680	715	25	32.5	PP	2	2	
5PZS650	650	101	198	680	715	30.5	41	PP	2	2	
6PZS780	780	119	198	680	715	36.3	48.5	PP	2或4	2	
7PZS910	910	137	198	680	715	43	57	PP	2或4	2	
8PZS1040	1040	155	198	680	715	48.5	64.5	PP	2或4	2	
9PZS1170	1170	173	198	680	715	54.5	72.5	PP	2或4	2	
10PZS1300	1300	191	198	680	715	59.8	80	PP	4	2	
2PZS280	280	47	198	680	715	14.5	19.3	PP	2	2	
3PZS420	420	65	198	680	715	20.5	27	PP	2	2	
4PZS560	560	83	198	680	715	26.5	34.5	PP	2	2	
5PZS700	700	101	198	680	715	32.5	43.5	PP	2	2	
6PZS840	840	119	198	680	715	38.5	51.8	PP	2或4	2	
7PZS980	980	137	198	680	715	45.5	61	PP	2或4	2	
8PZS1120	1120	155	198	680	715	51.5	69	PP	2或4	2	
9PZS1260	1260	173	198	680	715	57.5	77	PP	2或4	2	
10PZS1400	1400	191	198	680	715	63	85	PP	4	2	
2PZS300	300	47	198	690	725	15.3	20	PP	2	2	
3PZS450	450	65	198	690	725	21.5	29	PP	2	2	
4PZS600	600	83	198	690	725	28.5	38.5	PP	2	2	
5PZS750	750	101	198	690	725	35.5	47.5	PP	2	2	
6PZS900	900	119	198	690	725	42	56.5	PP	2或4	2	
7PZS1050	1050	137	198	690	725	50	65.5	PP	2或4	2	
8PZS1200	1200	155	198	690	725	56.5	73	PP	2或4	2	
9PZS1350	1350	173	198	690	725	63	82	PP	2或4	2	
10PZS1500	1500	191	198	690	725	69	91	PP	4	2	

2V牵引用铅酸蓄电池

2V Tracttion Lead Acid Battery



型号 Type	5小时率 额定容量 5hr Capacity (Ah)	最大外型尺寸(mm) Overall dimensions				参考质量 ± 5% Reference Weight (kg)		容量材料 Material of container 槽 / 盖	极柱 数量	单体 电池 电压 (V)	备注
		长	宽	高	总高	无液	带液				
		L	W	H	H	Dry	Wet				
D-160	160	98	180	323	362	12	14	PP	2	2	
D-250	250	136	179	290	335	13.5	20	PP	2	2	
D-250	250	140	210	292	335	13.5	20	PP	2	2	
D-330	330	136	179	350 ~ 370	385 ~ 405	19.6	28	PP	2	2	
D-395	395	136	179	405	447	22.5	29.5	PP	2	2	
D-440B	440	175	180	404	450	24	30	PP	2	2	
D-515	515	175	180	404	450	26	33	PP	4	2	
D-620	620	173	158	453	478	28	37	PP	2或4	2	

电动车电池用铅酸蓄电池

Lead Acid Battery Used as Power Resources for Electric Motor Cars



型号 Type	5小时率 额定容量 5hr Capacity (Ah)	电压 (v)	最大外型尺寸(mm) Overall dimensions				参考质量 ± 5% Reference Weight (kg)		容量材料 Material of container 槽 / 盖	备注
			长	宽	高	总高	无液	带液		
			L	W	H	H	Dry	Wet		
3-D-150	150	6	260	180	245	288	21.5	29.5	PP	
3-D-180	180	6	260	180	245	288	22	32	PP	
3-D-190	190	6	260	180	245	288	22	32	PP	
3-D-200	200	6	245	190	245	290	24.5	35	PP	
3-D-210	210	6	245	190	245	290	24.5	35	PP	
3-D-220	220	6	245	190	275	315	27.5	37.5	PP	
3-D-250	250	6	245	190	275	315	27.5	37.5	PP	
6-D-60	60	12	260	170	245	276	19	25	PP	
6-D-80	80	12	260	170	245	276	21	27	PP	
6-D-90	90	12	360	171	245	276	22	28	PP	
6-D-120	120	12	360	172	245	276	23	33	PP	